

TRI-RIM[®]


Rims & Spacers

Tried and Tested, Now Even Further Improved

The three parted rim system for trucks, buses and trailers, already long established in the market, has now been further developed into a high-precision, individual safety component in 20" and 24" size segments for single and dual tyres.

Advantages of the triple rim system:

- Ruggedness and the highest degree of safety, even with additional loading
- Easy wheel changing
- Safe wheel changing
- Longevity and durability

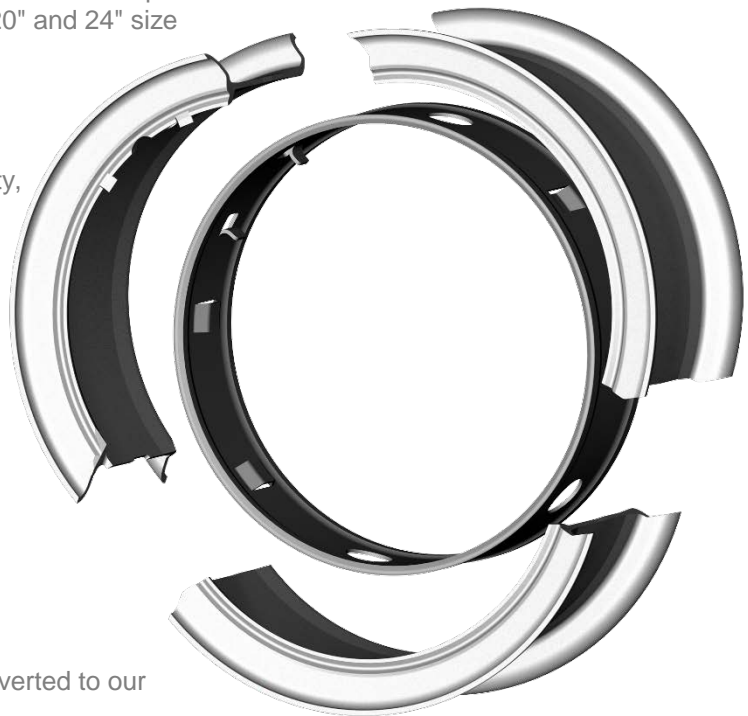


Vehicles equipped with disc wheels can be converted to our **TRI-RIM[®]** system (20" and 24").

The **TRI-RIM[®]** system is comprised of parts, each of the best quality in regards to tolerances and mechanical properties. The complete system is proven and certified by renowned test laboratories, where it is tested under very tough operating conditions to ensure the required ruggedness and highest degree of safety.




Select your **TRI-RIM®** parts:

Ø	Tyre	Rim
Inches		
20"	12.00 R20	8.5-20
20"	14.00 R20	10.0-20
20"	13/80 R20	8.5-20
20"	14/80 R20	10.0-20
24"	12.00 R24	8.5-24
24"	14.00 R24	10.0-24

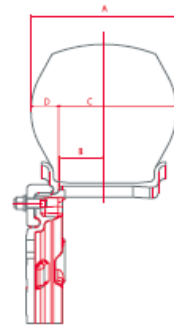

A	B	C	D	E	F	Z	M
mm	mm	mm	mm	mm	mm	mm	mm
286	92.0	235.0	51.0	379	42	124	328
313	98.5	255.0	58.0	414	43	139	356
370	116.5	301.5	68.5	499	60	177	430
321	98.5	259.0	62.0	426	43	147	364
350	116.5	291.5	58.5	459	50	147	400
313	98.5	255.0	58.0	414	43	139	356
370	116.5	301.5	68.5	499	60	177	430

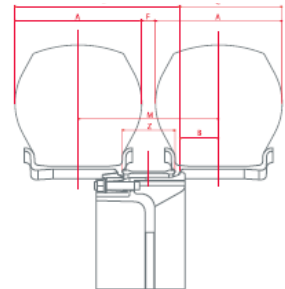

TRI-RIM® Rims



Ø	Type	Weight	Order No.
Inches		Kg	
20"	8.5-20	38.5	101 410 355
20"	10.0-20	50.0	101 410 373
24"	8.5-24	46.5	101 410 357
24"	10.0-24	60.0	on request

Spacers for TRI-RIM® Rims



Ø	Width	Weight	Order No.
Inches	Mm	kg	
20"	139	8.0	104 042 049
20"	147	7.2	104 042 051
20"	177	12.2	on request
24"	139	10.9	104 042 449
24"	147	11.2	104 042 451
24"	177	15.1	on request